

Characteristics

Tailor-made length
3-phase
Decentralised system
High pressure Airstop
Preferred height: ask advice
Aluzinc

Models

AS315K
AS355K
AS400K
AS450K
AS535/11
AS535/15

Application

Cool cells
Outside doors
Design
Logistics

Options

RAL colour
Stainless steel
Heating (electrical or water)

Steering

On/Off (IVPO)
5-step/Frequency converter (FRXM)




Masterveil Europe*

Brusselbaan 192, BE-9320 Erembodegem

Tel: +32 (0)53 60 78 90 | Fax: +32 (0)53 60 78 99 | Mail: office@deweerdtd.be

* Masterveil is a subsidiary of Deweerdt BVBA

Components and options horizontal and double standing setup

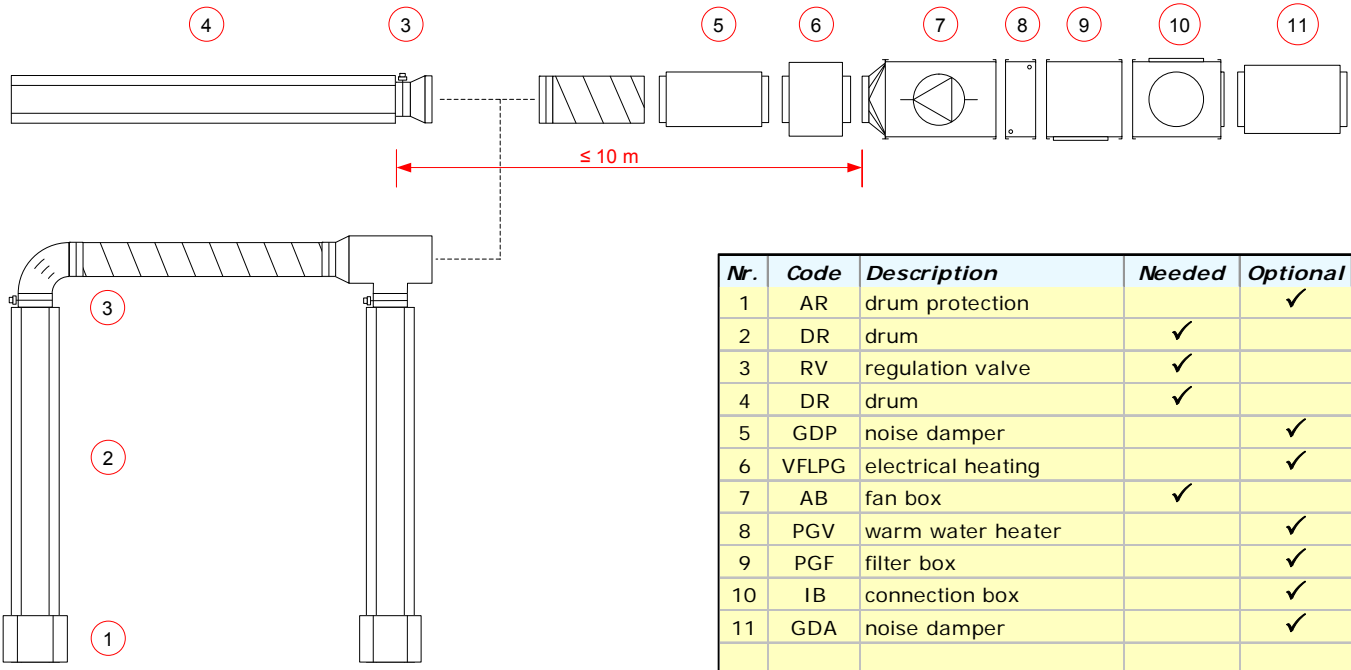

Different connections on drum (outblow)

The duct connection can be at any place on the drum although a left or right connection is preferred.

Standardized we distinguish:

- Left/middle/right in front of the drum
- Left/middle/right on top of the drum

Masterveil Europe*

Brusselbaan 192, BE-9320 Erembodegem

Tel: +32 (0)53 60 78 90 | Fax: +32 (0)53 60 78 99 | Mail: office@deweerdtdt.be

* Masterveil is a subsidiary of Deweerdt BVBA